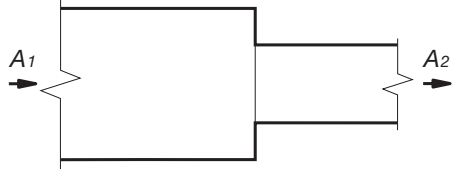
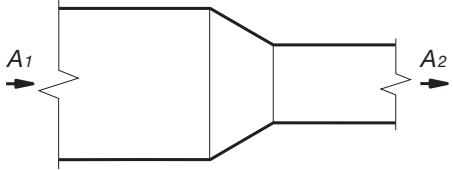
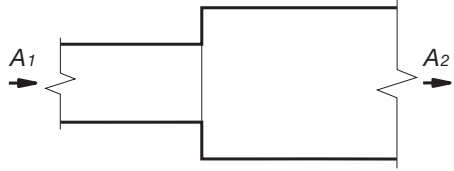
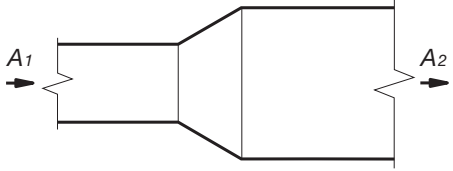
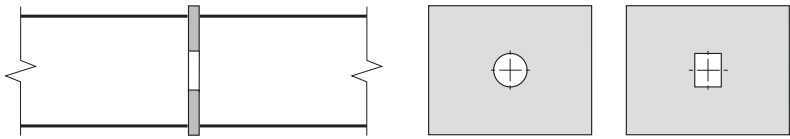
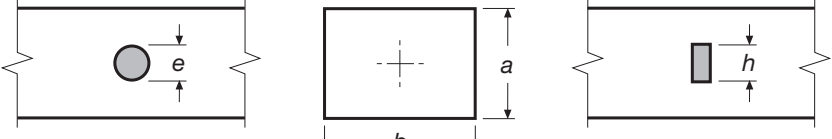
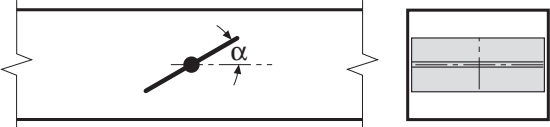
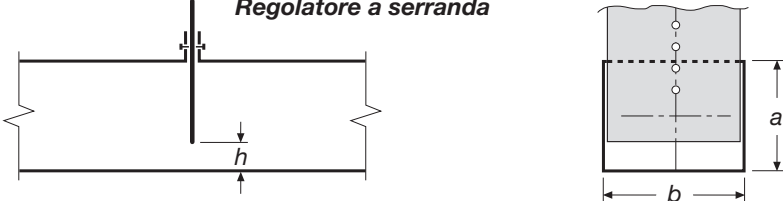




Canali rettangolari - valori indicativi dei coefficienti ξ - variazioni di sezione e regolatori

<p>Restringimento senza invito</p>  <table border="1" data-bbox="793 274 949 497"> <thead> <tr> <th>A_2/A_1</th> <th>ξ</th> </tr> </thead> <tbody> <tr> <td>0,2</td> <td>0,5</td> </tr> <tr> <td>0,4</td> <td>0,4</td> </tr> <tr> <td>0,6</td> <td>0,3</td> </tr> <tr> <td>0,8</td> <td>0,2</td> </tr> </tbody> </table>	A_2/A_1	ξ	0,2	0,5	0,4	0,4	0,6	0,3	0,8	0,2	<p>Restringimento con invito</p>  <p>$\xi = 0,2$</p>																										
A_2/A_1	ξ																																				
0,2	0,5																																				
0,4	0,4																																				
0,6	0,3																																				
0,8	0,2																																				
<p>Allargamento senza invito</p>  <table border="1" data-bbox="793 634 949 857"> <thead> <tr> <th>A_2/A_1</th> <th>ξ</th> </tr> </thead> <tbody> <tr> <td>0,1</td> <td>0,9</td> </tr> <tr> <td>0,2</td> <td>0,7</td> </tr> <tr> <td>0,4</td> <td>0,4</td> </tr> <tr> <td>0,6</td> <td>0,2</td> </tr> </tbody> </table>	A_2/A_1	ξ	0,1	0,9	0,2	0,7	0,4	0,4	0,6	0,2	<p>Allargamento con invito</p>  <table border="1" data-bbox="1704 634 1859 857"> <thead> <tr> <th>A_2/A_1</th> <th>ξ</th> </tr> </thead> <tbody> <tr> <td>0,1</td> <td>0,5</td> </tr> <tr> <td>0,2</td> <td>0,3</td> </tr> <tr> <td>0,4</td> <td>0,2</td> </tr> <tr> <td>0,6</td> <td>0,2</td> </tr> </tbody> </table>	A_2/A_1	ξ	0,1	0,5	0,2	0,3	0,4	0,2	0,6	0,2																
A_2/A_1	ξ																																				
0,1	0,9																																				
0,2	0,7																																				
0,4	0,4																																				
0,6	0,2																																				
A_2/A_1	ξ																																				
0,1	0,5																																				
0,2	0,3																																				
0,4	0,2																																				
0,6	0,2																																				
<p>Diaframmi di equilibratura</p>  <p>A = area sezione canale A^* = area passaggio diaframma</p> <table border="1" data-bbox="180 1166 1034 1247"> <thead> <tr> <th>A^*/A</th> <th>0,20</th> <th>0,25</th> <th>0,30</th> <th>0,35</th> <th>0,40</th> <th>0,45</th> <th>0,50</th> <th>0,55</th> <th>0,60</th> </tr> </thead> <tbody> <tr> <th>ξ</th> <td>50</td> <td>30</td> <td>20</td> <td>15</td> <td>8</td> <td>7</td> <td>4</td> <td>3</td> <td>2</td> </tr> </tbody> </table>	A^*/A	0,20	0,25	0,30	0,35	0,40	0,45	0,50	0,55	0,60	ξ	50	30	20	15	8	7	4	3	2	<p>Tubi e barre che attraversano canali</p>  <table border="1" data-bbox="1115 1140 1464 1221"> <caption>Tubi</caption> <thead> <tr> <th>e/d_e</th> <th>0,10</th> <th>0,25</th> <th>0,50</th> </tr> </thead> <tbody> <tr> <th>ξ</th> <td>0,2</td> <td>0,6</td> <td>2,0</td> </tr> </tbody> </table> <table border="1" data-bbox="1566 1140 1915 1221"> <caption>Barre</caption> <thead> <tr> <th>h/d_e</th> <th>0,10</th> <th>0,25</th> <th>0,50</th> </tr> </thead> <tbody> <tr> <th>ξ</th> <td>0,7</td> <td>1,4</td> <td>4,0</td> </tr> </tbody> </table> <p>d_e = diametro equivalente</p>	e/d_e	0,10	0,25	0,50	ξ	0,2	0,6	2,0	h/d_e	0,10	0,25	0,50	ξ	0,7	1,4	4,0
A^*/A	0,20	0,25	0,30	0,35	0,40	0,45	0,50	0,55	0,60																												
ξ	50	30	20	15	8	7	4	3	2																												
e/d_e	0,10	0,25	0,50																																		
ξ	0,2	0,6	2,0																																		
h/d_e	0,10	0,25	0,50																																		
ξ	0,7	1,4	4,0																																		
<p>Regolatore a farfalla</p>  <table border="1" data-bbox="180 1527 1034 1608"> <thead> <tr> <th>α</th> <th>0°</th> <th>10°</th> <th>20°</th> <th>30°</th> <th>40°</th> <th>45°</th> <th>50°</th> <th>55°</th> <th>60°</th> </tr> </thead> <tbody> <tr> <th>ξ</th> <td>0,2</td> <td>0,6</td> <td>1,8</td> <td>4,4</td> <td>11</td> <td>21</td> <td>35</td> <td>65</td> <td>105</td> </tr> </tbody> </table>	α	0°	10°	20°	30°	40°	45°	50°	55°	60°	ξ	0,2	0,6	1,8	4,4	11	21	35	65	105	<p>Regolatore a serranda</p>  <table border="1" data-bbox="1115 1495 1719 1576"> <thead> <tr> <th>h/d_e</th> <th>0,2</th> <th>0,3</th> <th>0,4</th> <th>0,5</th> <th>0,6</th> <th>0,7</th> </tr> </thead> <tbody> <tr> <th>ξ</th> <td>30</td> <td>11</td> <td>5,2</td> <td>2,2</td> <td>1,3</td> <td>0,5</td> </tr> </tbody> </table> <p>d_e = diametro equivalente</p>	h/d_e	0,2	0,3	0,4	0,5	0,6	0,7	ξ	30	11	5,2	2,2	1,3	0,5		
α	0°	10°	20°	30°	40°	45°	50°	55°	60°																												
ξ	0,2	0,6	1,8	4,4	11	21	35	65	105																												
h/d_e	0,2	0,3	0,4	0,5	0,6	0,7																															
ξ	30	11	5,2	2,2	1,3	0,5																															
<p>Rete di protezione</p>  <p>A = area sezione canale A^* = area netta passaggio aria</p> <table border="1" data-bbox="538 1885 1034 1966"> <thead> <tr> <th>A^*/A</th> <th>0,2</th> <th>0,3</th> <th>0,4</th> <th>0,5</th> <th>0,6</th> <th>0,7</th> </tr> </thead> <tbody> <tr> <th>ξ</th> <td>17</td> <td>6,5</td> <td>3,0</td> <td>1,7</td> <td>1,0</td> <td>0,8</td> </tr> </tbody> </table>	A^*/A	0,2	0,3	0,4	0,5	0,6	0,7	ξ	17	6,5	3,0	1,7	1,0	0,8	<p>Lamiera forata</p>  <p>A = area sezione canale A^* = area netta passaggio aria</p> <table border="1" data-bbox="1449 1885 1944 1966"> <thead> <tr> <th>A^*/A</th> <th>0,2</th> <th>0,3</th> <th>0,4</th> <th>0,5</th> <th>0,6</th> <th>0,7</th> </tr> </thead> <tbody> <tr> <th>ξ</th> <td>60</td> <td>22</td> <td>9,0</td> <td>4,0</td> <td>2,2</td> <td>1,0</td> </tr> </tbody> </table>	A^*/A	0,2	0,3	0,4	0,5	0,6	0,7	ξ	60	22	9,0	4,0	2,2	1,0								
A^*/A	0,2	0,3	0,4	0,5	0,6	0,7																															
ξ	17	6,5	3,0	1,7	1,0	0,8																															
A^*/A	0,2	0,3	0,4	0,5	0,6	0,7																															
ξ	60	22	9,0	4,0	2,2	1,0																															